



## Owner's Manual and Warranty Card

<b>M-009LS/019LS</b>	<b>Alpine</b>	<b>M-022LS</b>	<b>Glow</b>
<b>M-001LS</b>	<b>Nest</b>	<b>M-031LS</b>	<b>Camaro</b>
<b>M-011LS/021LS</b>	<b>Silver Cloud</b>	<b>M-051LS</b>	<b>Super Camaro</b>
<b>M-022LS</b>	<b>Oasis</b>		
	<b>Twilight/Sapphire</b>		

### EN

DO NOT RETURN MERCHANDISE TO YOUR DEALER STORE DIRECTLY. CALL MSPA AFTER SALES SERVICE CENTER FOR PRODUCT QUESTIONS OR CONTACT MSPA AT [info@the-mspa.com](mailto:info@the-mspa.com)

Due to MSpa continuous product improvement, MSpa reserves the right to change specifications and product appearance, which may result in updates to the instruction manual without notice.



# ENTER THE WORLD OF MSPA

---

Welcome,

Thank you for choosing MSPa and for your confidence in our brand. We believe that you will enjoy many benefits of using MSPa products for years to come.

To guide you in your initial MSPa experience, we are pleased to present you with this instruction manual. Please carefully and thoroughly read this manual entirety before using the product for the first time.

We are delighted to welcome you to the MSPa family, and look forward to sharing with you the full spectrum of our expertise.

Enjoy your MSPa!



Scan the QR code to enter the MSPa official website

## CONTENT

---

Safety precautions.....	3
Specifications and product overview.....	8
First use and set-up preparation.....	10
Spa set-up.....	12
Control panel operation.....	16
Water maintenance and chemicals.....	17
Drainage, cleaning and storage.....	20
Disposal and environmental protection.....	21
Troubleshooting.....	22
MSPa limited warranty policy.....	24
MSPa service center locations.....	25
MSPa warranty card.....	26

# SAFETY PRECAUTIONS

---

For your own safety and that of your product, make sure to following the safety precautions below. Fail to follow the instruction may result in serious injury, property damage or death. Improper installation or operation will void the warranty.

## READ, UNDERSTAND AND FOLLOW ALL INSTRUCTIONS

### DANGER

- Risk of Accidental Drowning. Extreme caution must be exercised to prevent unauthorized access by children.
- Risk of drowning. Inspect the spa cover regularly for leak, premature wear and tear, damage or signs of deterioration. Never use a worn or damaged cover: it will not provide the level of protection required to prevent unsupervised access to the spa by a child.
- Risk of drowning. Always lock the spa cover after each use.
- Risk of injury. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- Risk of Electric Shock. Do not permit any electrical appliances, such as a light, telephone, radio or television within 1.5m (5 feet) of a spa tub.
- Risk of Electric Shock. Do not use the spa when it is raining, thundering or lightning.

### WARNING

- To reduce the risk of electric shock, do not use an extension cord, timers, plug adaptors or converter plugs to connect the unit to electric supply; provide a properly located outlet.
- The spa electrical appliance should be supplied through a residual current device (RCD) having a rated residual operating current not exceeding **10 mA**.
- Parts containing live parts, except parts supplied with safety extra-low voltage not exceeding 12V, must be inaccessible to occupants in the spa.
- Parts incorporating electrical components, except remote control devices, must be located or fixed so that they cannot fall into the spa.

- Residential electrical connection box must be located safely with a distance of at least 2m away from the spa.
- Electric installation should fulfill the local requirement or standards.
- Do not press down or uplift the control panel or put any heavy items on the control panel after installations.
- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.
- To reduce the risk or injury, do not permit children use this product unless they are closely supervised all times.
- To reduce the risk of child drowning, supervise children all times. Attach and lock spa cover after each use.
- Make sure the floor is capable of supporting the expected load, which you can find from the spec sheet, calculate the expected load of water capacity plus total weight.
- Adequate draining system must be provided around the spa to deal with overflow water.
- To reduce the risk of injury:
  - a) Lower water temperatures are recommended for young children and when spa use exceeds 10 minutes. In order to avoid the possibility of hyperthermia (heat stress) occurring it is recommended that the average temperature of spa-pool water should not exceed 40°C(104°F).
  - b) Since excessive water temperatures have a high potential for causing fetal damage during the early months of pregnancy, pregnant or possibly pregnant women should limit spa water temperatures to 38°C(100°F).
  - c) Before entering a spa or hot tub the user should measure the water temperature with an accurate thermometer since the tolerance of water temperature regulating devices varies.
  - d) The use of alcohol, drugs or medication before or during spa use may lead to unconsciousness with the possibility of drowning.
  - e) The use of alcohol, drugs, or medication can greatly increase the risk of fatal hyperthermia in spas.
  - f) The causes and symptoms of hyperthermia may be described as follows:  
Hyperthermia occurs when the internal temperature of body reaches a level

several degrees above the normal body temperature 37°C(98.6°F). The symptoms of hyperthermia include an increase in the internal temperature of body, dizziness, lethargy, drowsiness, and fainting. The effect of hyperemia include failure to perceive heat; failure to recognize the need to exit spa; unawareness of impending hazard; fetal damage in pregnant women; physical inability to exit the spa; and unconsciousness resulting in the danger of drowning.

- g) Obese persons or persons with a history of heart disease, low or high blood pressure, circulatory system problem, or diabetes should consult a physician before using a spa.
  - h) Persons using medication should consult a physician before using a spa since some medication may induce drowsiness while other medication may affect heart rate, blood pressure, and circulation.
  - i) Check with doctor before use if pregnant, diabetic, in poor health, or under medical care.
- People with infectious disease should not use a spa or hot tub.
  - To avoid injury exercise care when entering or existing the spa or hot tub.
  - Water temperature in excess of 42°C(108°F) may be injurious to your health.
  - Never use a spa or hot tub alone or allow others to use the spa alone.
  - Do not use a spa or hot tub immediately following strenuous exercise.
  - Spa heat in conjunction with alcohol, drugs, or medication can cause unconsciousness.
  - Exit immediately if uncomfortable, dizzy, or sleepy. Spa heat can cause hyperthermia and unconsciousness.

Do not put the spa under 0°C(32°F) environment in order to avoid freezing if there is still water in the pool.

It's helpful to put temp barrier mat in between the spa pool and the ground. Similar mat which is made of foam material or other materials with heat barrier function can also be used. Do not turn on the spa when the water is frozen.


- Never pour water with a temperature higher than 40°C(104°F) into the spa directly.
- Always unplug this product from the electrical outlet before removing, cleaning, servicing or making any adjustment to the product.
- Never jump or dive into a spa or any shallow body of water.
- No part of the electric appliance is to be located above the bath during use.
- Do not bury the electrical cord. Locate the cord where it will not be damaged by lawn mowers, hedge trimmers and other equipment.

- Do not attempt to plug in or unplug this product while standing in water or when your hands are wet.
- Do not use the spa if damaged in delivery and/or malfunctioning in any way.
- Contact the MSpa service center for further direction.
- Keep all pets away from the spa to avoid any damage.
- Do not add bath oil or bath salt to the spa water.

## CAUTION

- Always add chemicals to water, never add water to chemicals. Adding water to chemicals may cause strong fumes or violent reactions and hazardous chemical spray.
- For water already used, discharge it in time or use water chemicals for cleaning. Usually, change water every 3-5 days.
- Use Mspa chemical kit for disinfection in accordance with manufacture's instructions.
- Do not leave or set up the spa in temperature lower than 4°C(39°F) if heater is not operating.
- Always enter and exit the spa or hot tub slowly and cautiously. Caution of wet floor.
- To avoid damage to the pump, never turn on the spa or hot tubs unless it is filled with water to the minimum water line.
- Place the spa or hot tub only on a properly prepared site that can withstand the floor loading requirement of the spa.
- Do not leave the spa empty for extended period of time. Drain away water inside the pool thoroughly for long time disuse. Do not expose the spa under direct sunshine. Check regularly before each use. Put away the spa or fence it up in time after using.
- Open the spa top lid when the Bubble function is on.
- In order to avoid a hazard due to inadvertent resetting of the thermal cut-out, this appliance must not be supplied through an external switching device, such as a timer, or connected to a circuit that is regularly switched on and off by the utility.
- Refer to relevant chapter for details concerning cleaning and other maintenance.

**Warning:** Water protection levels of appliance at different product zones are different see the following scheme. ( **Installation regulations comply to IEC 60364-7-702**)

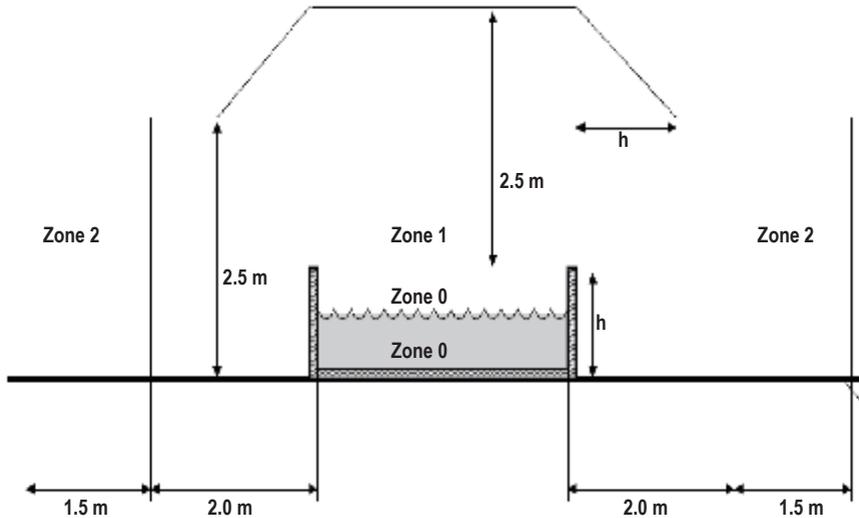

**NOTE-**The measured zone dimensions are limited by walls and fixed partitions.

Zones	Description of the zones
Zone 0	Zone 0 is the interior of the basin including any recesses in their walls or floors.
Zone 1	Zone 1 is limited by <ul style="list-style-type: none"> <li>• Zone 0</li> <li>• A vertical plane 2m from the rim of the basin.</li> <li>• The floor or the surface expected th be occupied by persons</li> <li>• The horizontal plane 2.5m above the floor or the surface</li> </ul>
Zone 2	Zone 2 is limited by <ul style="list-style-type: none"> <li>• A vertical plane external th zone 1 and parallel plane 1.5m from the former.</li> <li>• By the floor or surface intended to be occupied by persons.</li> </ul>

# SPECIFICATIONS








BUBBLE SPA (Europe, United Kingdom, Switzerland and Australia)							
Model No. / Code	Shape	Seating Capacity	Water Capacity	Outside Dimensions	Inside Dimensions	Height	Weight
M-009LS / ALPINE	Square	2  + 2	650Ltr (171gal)	1.58m (62")	1.18m (46.5")	0.68m (27")	21.5kgs (47.3lbs)
M-019LS / ALPINE	Square	4  + 2	930Ltr (245gal)	1.85m (73")	1.45m (57")	0.68m (27")	29kgs (63.8lbs)
M-001LS / NEST	Oval	2	550Ltr (145gal)	1.86m x 1.25m (73" x 49")	1.46m x 0.85m (57" x 33")	0.68m (27")	21kgs (46.2lbs)
M-011LS / SILVER CLOUD	Round	4	700Ltr (184gal)	1.80m (71")	1.40m (55")	0.70m (28")	22kgs (48.4lbs)
M-021LS / SILVER CLOUD	Round	6	930Ltr (245gal)	2.04m (80")	1.60m (63")	0.70m (28")	26kgs (57.2lbs)
M-022LS / OASIS	Round	4	700Ltr (184gal)	1.80m (71")	1.40m (55")	0.70m (28")	22kgs (48.4lbs)
M-022LS / GLOW	Round	4	700Ltr (184gal)	1.80m (71")	1.40m (55")	0.70m (28")	23kg (50.6lbs)
M-031LS / CAMARO	Round	4	700Ltr (184gal)	1.80m (71")	1.40m (55")	0.70m (28")	25kgs (55lbs)
M-051LS / SUPER CAMARO	Round	6	930Ltr (245gal)	2.04m (80")	1.60m (63")	0.70m (28")	34kgs (74.8lbs)

Control System Specs	M-009LS / 019LS / 001LS / 011LS / 021LS / 022LS	M-031LS / 051LS
Control System	220-240V / 50Hz	220-240V / 50Hz
Total Power	2100W	2100W
Heater	1500W	1500W
Massage Air Blower	600W	600W
Filter Pump	12V / 35W	12V / 35W
Top Lid	Rhino-Tech™ reinforced PVC	Premium PVC leather cover with foil inside
Pool Cover	None	Premium PVC tough leather, waterproof and anti-UV
Pool Material	Premium PVC fabric	Premium PVC fabric

Note: The symbol "S" after model number (e.g. M-009LS) is for purpose for lab testing updating, S means zodiac sheep year English initials. L means LITE.

# PRODUCT OVERVIEW

## Packaging content
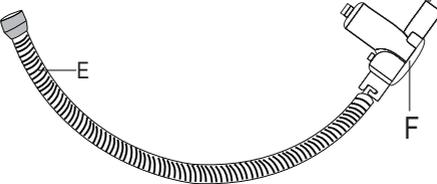
<p>A.</p> 	<p>B.</p> 	<p>C.</p> 	
<p>D.</p> 	<p>E.</p>  <p>F.</p> 	<p>G.</p> 	
<p>H.</p> 	<p>I.</p> 	<p>J.</p> 	<p>K.</p>  <p>*Only for Nest M-001LS</p>
<p>L. <b>ONLY FOR ALPINE M-009LS/019LS</b></p>  <p>*Buckle spa cover</p>  <p>*Ground mat</p>		<p>M.</p>  <p>*Only for Glow M-022LS</p>	<p>N.</p> 

**NOTE:** Drawings for illustration purpose only. Actual product may vary. Not to scale.

REF. NO.	PARTS DESCRIPTION	QTY.	PART NO.
A	Spa cover with aluminum foil inside (Alpine M-009LS/019LS comes with a ground mat with the cover)	1	Check the part No. with MSpa Service Center by providing the model No.
B	Spa tub	1	Check the part No. with MSpa Service Center by providing the model No.
C	Control panel with air pipe	1	B9300885
D	Digital lock (except for Alpine M-009LS/019LS)	1	B9300672
E	Inflation hose	1	B9300671
F	Manometer	1	B9300637
G	Filter cartridge	1	B0301964
H	Spa drain valve adaptor	1	B9300670
I	Repair kit	1	Check the part No. with MSpa Service Center by providing the model No.
J	Wrench	1	B9300419
K	Wicker side bar (Only for Nest M-001LS)	1	/
L	Buckle spa cover and ground mat set (For Alpine M-009LS/019LS)	1	M-019LS Buckle spa cover B9300639 M-019LS Ground mat set B9300707 M-009LS Buckle spa cover B9300688 M-009LS Ground mat set B9300689
M	LED strip (Only for Glow M-022LS)	1	B9300892
N	Instruction DVD	1	/

**NOTE:** When ordering parts, be sure to quote the model number and part numbers.

## FIRST USE AND SET-UP PREPARATION

---

### Site preparation and requirements

- The spa can be installed indoor and outdoor. For household use only.
- The spa must be set up on a flat, smooth and supporting surface that is capable of supporting the maximum load of the filled spa with listed maximum occupants.
- Make sure the area is free of sharp objects under or around the spa. Uneven or unsound surfaces can damage the spa and void your warranty. Level the surface before filling spa with water.
- Provide adequate drainage system around the spa to deal with overflow water and splashes.
- Make sure there is enough clearance around the spa for full access to the spa equipment for maintenance and/or service.

## Additional requirements for indoor installation

- Verify the supporting floor can support the filled weight of spa with maximum number of occupants. Check with a qualified contractor or structural engineer to verify the requirement.
- Make sure the floor is water resistant and provides non-slip surface. Do not install the spa on a carpet of any other material that could be damaged by the moisture.
- Humidity is a naturally side effect of indoor spa installation. The room shall be properly ventilated to allow moisture to escape. Install a ventilating system to prevent excess condensation moisture in the room.

## Additional requirements for outdoor installation


- Make sure to set up the spa on a firm, level and smooth surface that is strong enough to support the full weight of the filled spa and maximum occupants.
- Do not set up the spa on grass or dirt, as this increases the amount of debris entering the spa, and damage the spa floor.
- Do not leave the spa tub exposed to direct sun light for extend period of time.
- It is the possible to install and leave the spa outside at a temperature not lower than 4°C(39°F) and the water inside the circulation system, pump, pipe are not frozen. Put a Heat Preservation Mat or the Electric Heating Mat (\*Optional) in between the spa bottom and the ground to prevent heat loss from the bottom of the spa and to provide better heat retention.

## RCD or PRCD Testing

### WARNING


Risk of electric shock: This product is provided with a RCD located at the end of the power cord. The RCD must tested before each use. Do not use the spa if the RCD does not function properly. Disconnect the power cord until the fault has been identified and corrected. Contact a licensed electrician to correct the fault. There are no serviceable parts in side the RCD. Opening the RCD will void the warranty.

1. Plug the machine into the mains.
2. Press the **RESET** button on the RCD. The indicator turns red.
3. Press the **TEST** button on the RCD. The RCD indicator should shut off. If the RCD indicator does not turn off, the RCD is faulty.
4. Do not use the spa. Contact a qualified electrician to correct the fault. Press the **RESET** button on the RCD again. The indicator should turn red. If yes, the spa is ready for use.

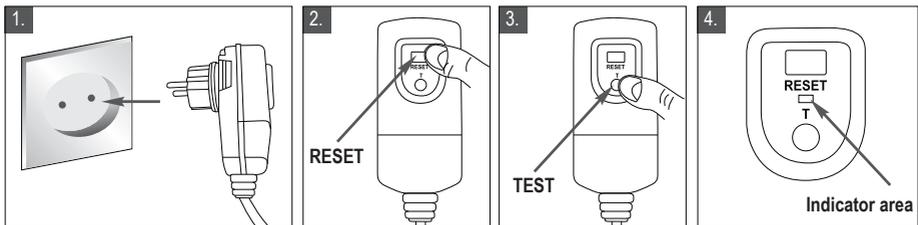

## PRCD

For spa models of Switzerland markets, test the PRCD using the above testing steps.

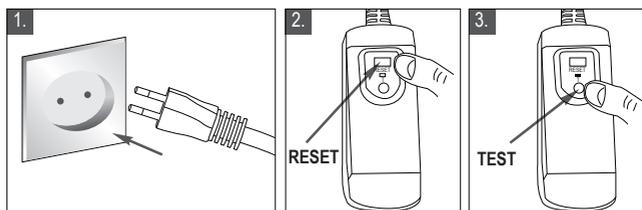



# SPA SET-UP

---

1. Move the entire package to the selected site. Open the carton carefully as it can be used to store the spa during long term storage or when not in use.
2. Lay out all the parts on the ground and make sure all parts are accounted for. Make sure the spa tub is right side up. (\*For missing or damaged part, contact the MSpa Service Center)


**NOTE:**

The heat preservation ground mat is not for the MSpa LITE except for Alpine M-009LS/019LS. It is recommended to apply a ground mat for the spa tub to prevent scratches or heat loss.

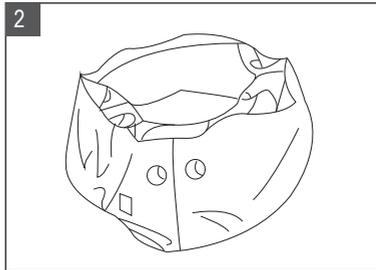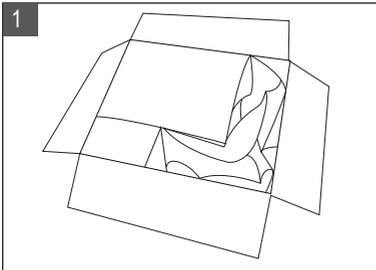


**NOTE:**

- **Nest M-001LS:** For this model, a side bar is included in the package. Set up the wicker bar and place the supporting legs underneath the spa tub before filling the water. It helps keeping the oval spa in a proper shape after water filling and inflation.

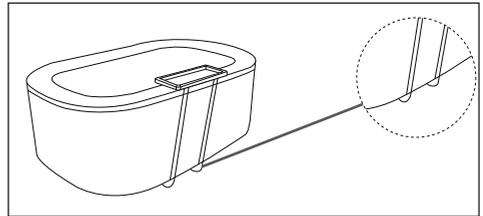


- **Alpine M-009LS/019LS:** Spread out the square ground mat and place it to the selected site. Make sure the buckle of cover and mat is attached when spa not in use.

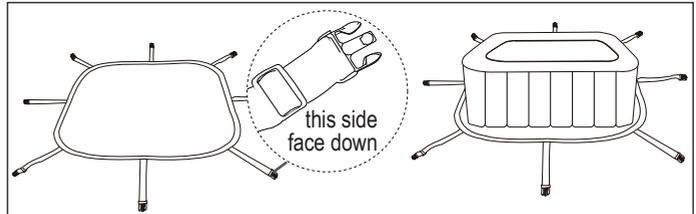

3. **Connect the digital cable on the control panel.** "ON/OFF" button shows red if the connection correctly, No bent or wet for the pin inside male connector which will cause failure connection.
4. Connect the control panel to the spa tub. Fasten and secure the rings to the pipe adapter on the spa tub. Make sure the rubber O-rings are properly placed on the air pipes.


**CAUTION:** Lost of the O-rings may result spa and the bubbling function working improperly, and also cause the air pump rusted.

**NOTE:** For spa models has PVC leather covers, make sure the spa cover is onto the spa tub properly before connecting the control panel. The two holes on the leather cover must be positioned correctly to the pipes of control panel air pipes.

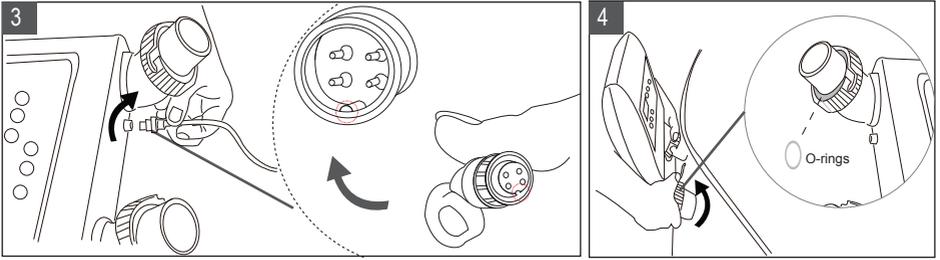

## 5. Spa Inflation

- 5.1 Unscrew the air valve cap (a) on the control panel to reveal the air blower inflation outlet and connect one end of the inflation hose (b) to the outlet. See Figure 5.1
- 5.2 Unscrew the air valve cap on the spa pool and reveal the stem for inflation.
- 5.3 Connect the other end of the inflation hose (b) to the manometer (c) first and then insert to the air valve.

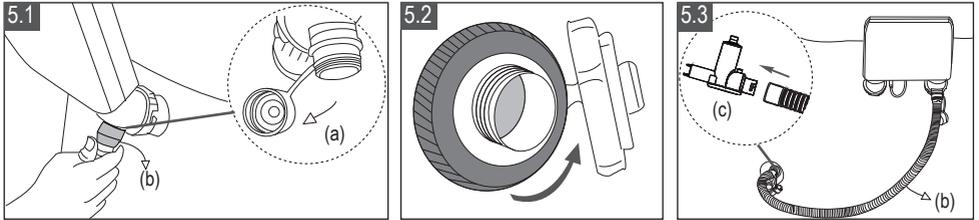


- 5.4 Press the Bubble  button to inflate the spa tub until it is firm to touch.

**CAUTION:** Do not over inflate. Over inflation may cause spa leakage and void the warranty.

- 5.5 Pay attention to the Manometer. The **Yellow** section appears when the spa is properly inflated. The **Green** section shows when water filling is completed. Repeat previous steps if more air is necessary.

**CAUTION:** The **Red** section shows when the spa is over inflated. Press the black button (a) on the manometer to release some air until it points the green section.

**IMPORTANT:** During spa use, the manometer shall only shows the **Green** section at all times.

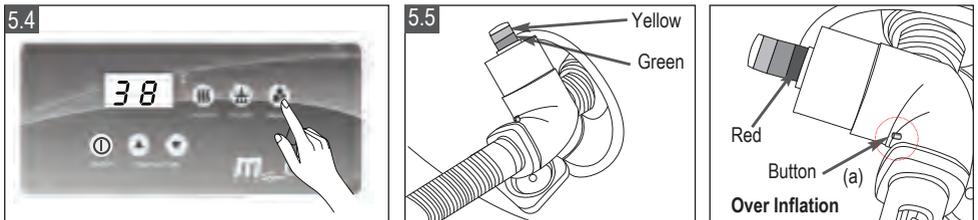

- 5.6 When inflation is completed. Press Bubble  button again to turn it off. Disconnect the inflation hose on both ends. Replace the air valve cap back.

### NOTE:

- The cap is designed to be screwed on and off. Never exert force as this could cause the complete internal inflation system of the valve to come loose.
- If over inflated, remove the inflation hose from the spa air valve side, screw the valve cap to release some air and stop until the manometer points to the right color section.


## NOTE: Deflation Instruction

### Spa Deflation

1. Unscrew the air valve cap on the spa pool to deflate the spa.
2. Once the deflation is completed, replace the cap back.

## 6. Water Filling

- 6.1 Check the spa liner is at the selected area and point the drain valve toward a suitable draining area before inflation.
- 6.2 Fill the spa tub with fresh water to a level between **Minimum** and **Maximum** line marked on the inside of the spa wall.

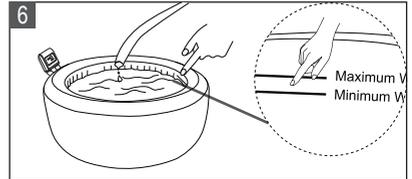

Do not over fill the spa. It is recommended to fill the spa with lukewarm water for quick heating and energy saving.


### WARNING:

- Water level must reach the Minimum water line but not exceed the Maximum line to avoid pump failure.
- Never pour water with a temperature higher than 40°C(104°F) into the spa directly.
- To avoid control system failure, do not operate the spa until water reaches the Minimum line.

- 6.3 After water filling, double check the spa pool air pressure to make sure the manometer points out the Green section.
- 6.4 Place the zipper spa cover over the spa tub, and make sure the spa cover zipper are closed and lock the cover by the digital lock in the accessory pack.

### IMPORTANT:

- Inspect the spa pressure regularly for leak, premature wear or deterioration.
- Check and wax the zipper regularly, to make it smooth for operation and avoid splits.

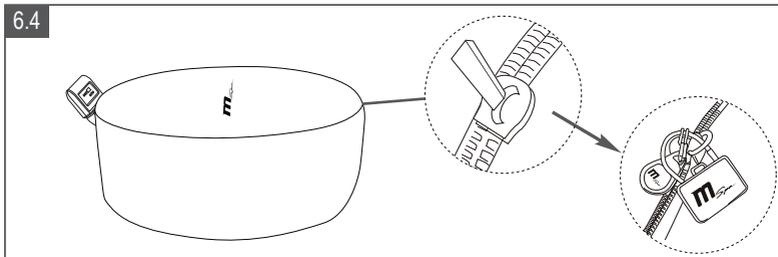

- 6.5 Turn on the Heater on the spa control panel, refer to the "Control Panel Operation" section. Maximum heating temperature is 42°C(108°F). Hourly heating rate is about 2°C-2.5°C(3.5°F-4.5°F) for 2 and 2+2 persons, 1.5°C-2°C(2.5°F-3.5°F) for 4 persons and 1.2°C-1.8°C(2°F-3°F) for 6 persons.




## 7. Zipper and Buckle Operation

### 7.1 Digital Lock Operation

Original password is "000". Following the steps below to change the password:

- Push the button (a) in the direction of Fig.7.1.(1) to unlock the digital lock.
- Set your preferred password in 3 digits by turning the number wheel (b), see Fig.7.1.(2).

- Insert back the cable (c). The new password is set.

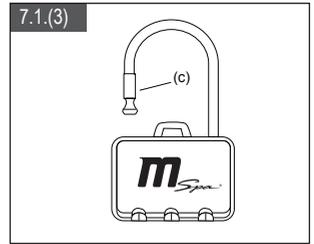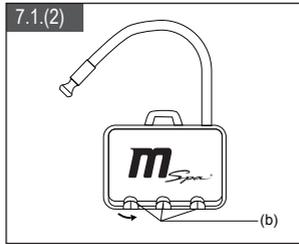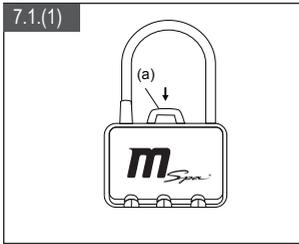


## 7.2 Square Spa Buckle Lock Operation

### Lock the Buckle


- Insert the buckle on the Ground Mat into the Spa cover buckle, until you hear a “Click” sound.

### Unlock the Buckle

- Pinch both sides of the locked buckle, and press down the round dot in center in the same time. Press down the center button and release the lock.

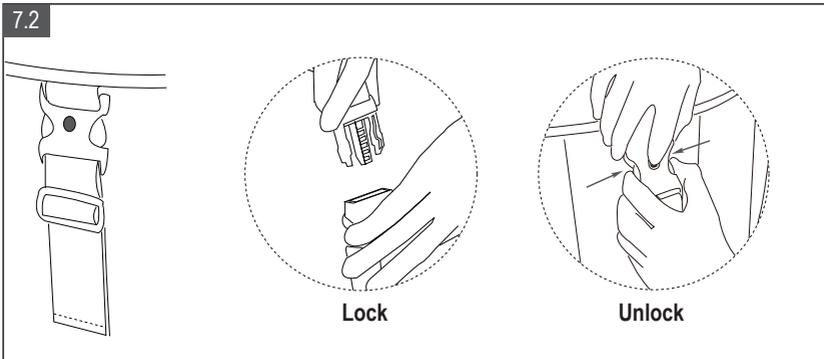

# CONTROL PANEL OPERATION

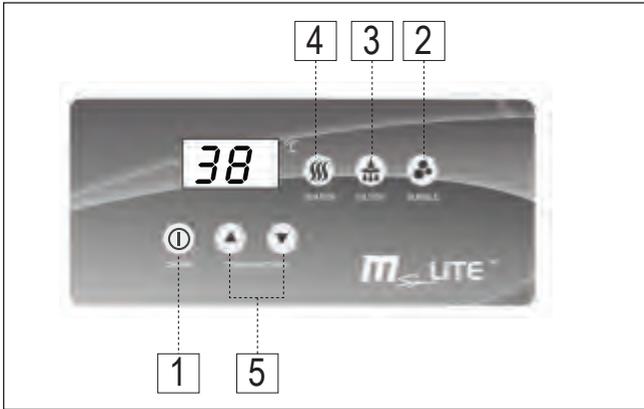


1. ON/OFF Button
2. Bubble Button
3. Filter Button
4. Heater Button
5. UP & DOWN Button

## ON/OFF

**ON/OFF Button:** To activate the control panel.

Default stand by mode shows red when the power is on. Press again, the control reaches operative mode and turns to green. The power consumption of the stand by mode is within 0.5W.



**Bubble Button:** To activate the bubbling massage function, which has a 20-minutes auto off for 10-minutes feature. The light of Bubble button displays green when activated.



**Filter Button:** Activate the filter pump. The light of the Filter Button displays green when the filtration system is activated.

**NOTE:** Filtration cannot be turned off when Heating is activated.

**NOTE:** Auto-filtration system every 4 hours.



**Heater Button:** Use this button to activate the HEATING and FILTRATION function at the same time. The heater will heat the spa water until the water temperature reaches the pre-set temperature. After the current water temperature drops 2°C(3.6°F) below the set temperature, the heating system will restart automatically. When the HEATER button is red, the heating system is activated. When the HEATER button is green, the heating system is at rest as the water is at the set temperature.



**Temperature Adjustment Buttons:** To adjust the temperature. You can set your desired temperature by pressing Increase or Decrease buttons. Please wait for 3 seconds to see the current water temperature.

**LOCK THE SCREEN:** Press “UP ▲” and “DOWN ▼” buttons together to lock the control panel to avoid any wrong operation by children. Press the two buttons together once again to unlock the control panel.

**IMPORTANT:** The following conditions will lead to slow water heating

- The ambient temperature is lower than 10°C(50°F)
- Outdoor wind speed is above 3.5-5.4m/s(8-12mph)
- The air bubble function is activated when heater is on
- The spa is not properly covered with the spa cover when heater is on

## ERROR CODE CHART

LED READING	CAUSE	SOLUTION
E0	Water temperature is lower than zero degree or exceed 55°C(131°F)	Change the water or contact the MSpa Service Center.
	Temperature sensor failure.	
E1	Water pressure switch failure	Contact the MSpa Service Center.
	Filter failure	
	Water level is not at minimum water line	Add more water to the minimum line.
E2	Detecting function failure	Contact the MSpa Service Center.
	No water in the spa tub	Add more water to the minimum line.
E3	System failure	System self-checking Step 1: Fill water to the water line, and make sure there is no bather or object in the spa tub. Step 2: Connect the power supply, press REST button on the RCD. Step 3: If E3 shows, contact the MSpa Service Center. If E3 is flashing, press ON/OFF and BUBBLE buttons together, enter to the self-checking system. If no error code shows, failure is not detected. It is OK to use the spa. If error code shows after self-checking, contact the MSpa Service.

## WATER MAINTAINCE AND CHEMICALS

---

### Water Sanitation

The spa owner must regularly check and keep the spa water sanitized with scheduled maintenance (daily, if necessary). Adding sanitizer or other chemical will control bacteria and viruses present in the spa water. The maintenance of a proper water balance through appropriate use of sanitizers is the most important factor in maximizing the life and appearance of the spa as well as ensuring clean, healthy and safe water.

Proper technique is important for water testing and treating the spa water. See your spa professional for chemical, sanitizer, test kit and testing procedures questions.


### CAUTION:

- Always follow the chemical manufacturer's direction, and the health and hazard warning.
- Do not add chemicals if the spa is occupied. This can cause skin or eye irritation.
- Concentrated chlorine solutions can damage the spa tub. Improper chemical use will void the warranty.

## Maintenance of Spa Water and Cartridge

Protect all the spa occupants from possible water related illness by keeping the spa water clean and sanitized. Always practice good hygiene. To ensure proper spa water quality by following these procedures:

1. Inspect and clean the filter cartridge after each use, and change the filter cartridge after it works continuously for 72 hours.
  - Unscrew the cartridge assembly from the spa tub wall and remove the cartridge by turning it counter clockwise (Fig. 1.1)
  - Use a garden hose to rinse off the cartridge. If the cartridge remains soiled and discolored it should be replaced. Keep spare cartridges on hand.(Fig.1.2).
  - Reinstall the clean or spare cartridge back onto the spa tub wall but turning it on clockwise. (Fig.1.3)

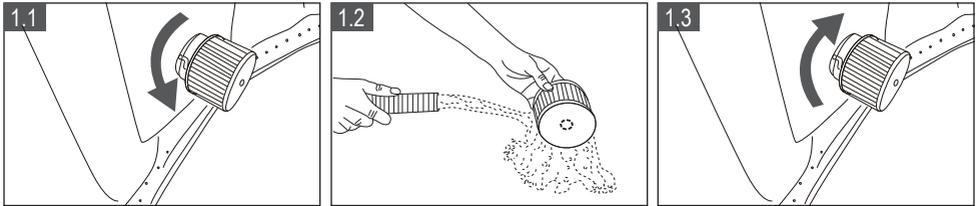

2. Change the spa water every 3-5 days depends on the spa use. See “Cleaning, draining and storage” section for instruction.
3. Use spa chemicals to maintain proper water chemistry. Spa damage resulting from misuse of chemicals and mismanagement of spa water is not covered by the warranty. Consult with your local spa or pool retailer for more information on chemical use.
4. All occupants must shower before entering the spa.
5. When spa inlet or outlet is stuck with dirt. Use the Wrench to check the problem and clean the inlet or outlet.



## Water Balance

Maintain the spa water pH level between 7.2 and 7.8, total alkalinity between 80 and 120ppm and free chlorine level between 3 to 5ppm. Use the \*optional Test Strips to test the spa water chemistry before each use of the spa and continue to test the water no less than once a week.

The Test Strips can test the “Free Chlorine”, “pH”, and “Total Alkalinity” level at the same time:

1. Dip the entire strip into the water and remove immediately
2. Hold the strip level for 15 seconds. Do not shake excess water from the strip
3. Compare the strip pad to the color chart on the packaging label. If necessary, adjust the chemical level in the pool water

### NOTE:

- Low pH will damage the spa tub and pump. Damage resulting from the chemical imbalance will void the warranty.
- High pH (hard water) will result in white coagulations inside the filter pump; which may lead to pump damage.

## IMPORTANT:

- MSpa Water Treatment kit is strongly recommended for spa use.
- Press the  Bubble button on the spa control panel to turn on the bubble air blower and help to dissolve the chemicals into the water.
- Never mix chemicals together. Add the chemicals to the spa water separately. Thoroughly dissolve each chemical before adding one to the water.



## MSpa Water Treatment Kit (\* Optional)


- **B0301858 MSpa Chemical Starter Kit (20 X 20g Bromine Tablets + 500ml Algaecide + Floating Dispenser)**  
Disinfectant for water spas and pools. disinfectant, algaecide and bactericide.
- **B0301859 Bromine Tablets - 50 X 20g Bottle**  
Slowly dissolve in water to provide active bromine sanitizer in the form of hypobromous acid.
- **B0301860 Chlorine Granules - 1Kg Bottle**  
Adds isocyanuric acid to the spa water which resists chlorine loss from UV rays. Does not contain calcium, can be used to sanitize hard water without increasing the calcium hardness. Contains troclosene Sodium, dehydrate 100%.
- **B0301861 Algaecide - 1L Bottle**  
Kills all types of algae, including green and mustard algae. Non-foaming algaecide for improving and conserving water in spas. Contains polymeric quaternary ammonium chloride 7%.
- **B0301862 pH Plus - 1Kg Bottle**  
For increasing the pH in the spa water. Contains sodium Carbonate 100%.
- **B0301863 pH Minus - 1.5Kg Bottle**  
For decreasing the pH in the spa water. Contains sodium bisulphate 100%.

# DRAINAGE, CLEANING AND STROAGE

---

## Spa Drainage

1. Turn off all the buttons (heater, filter and bubble) on the control panel unit.
2. Connect the drain valve adapter to a garden hose and point the other end of the garden hose to a suitable draining area with local environmental regulations (Fig.1)
3. Remove the drain valve cap from the outside of the spa tub and attach the drain valve adapter with the garden hose to the drain valve (Fig.2)
4. From the inside of the spa tub, open the drain valve cap, water will start to flow out through the garden hose (Fig.3)
5. When the water stops draining, lift the spa tub wall from the opposite to the drain, leading any remaining water to the drain and empty the spa water completely. (Fig.4)
6. Press  Bubble button to dry out any water in the piping system. Operate the bubbling function for 15 minutes to blow out all the remaining water. (Fig.5)
7. When the water stops draining, use a clean towel to wipe up any remaining water and moisture on the spa tub and spa control panel. (Fig.6)

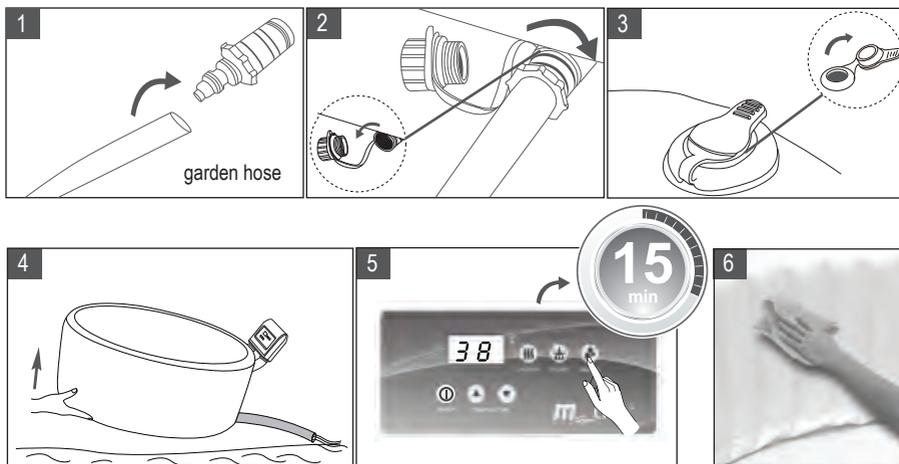

## Spa Tub Cleaning

If dirt is visible in the water or water becomes cloudy and proper water chemistry does not clear it up, change the water and clean the spa tub.

While spa water is empty, remove the cartridge from the inside of the spa tub wall, clean and /or replace the filter cartridge. Use a sponge and mild soap solution to wipe away any soil or stains on the inside of the spa wall. Rinse thoroughly before refilling with clean water.


**IMPROTANT:** Do not use steel wool, hard brushes or abrasive cleaners.

## Spa Tub and Air Bladder(\*Optional) Repair

Use the enclosed repair patch to repair any puncture:


1. Clean and dry the area to be repaired thoroughly
2. Apply the glue to the PVC patch and quickly attach it onto the damaged surface. (Glue is not included)
3. Smooth the surface to remove any air bubbles and allow it dry for 5-10 minutes

**NOTE:** Glue is not included.

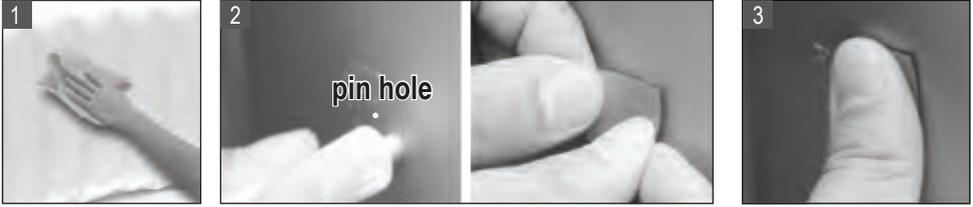

### Storage and Prepare for the Next Time Use

1. Drain and clean the spa by following the “Drainage” and “Spa Cleaning” sections
2. Reserve the set up instructions to deflate and disassemble the spa tub, spa control unit and air bladder
3. Make sure all the spa components and accessories are thoroughly clean and dry before storage. Air-dry the spa tub in the mild sun for an hour before folding
4. Fold the spa tub loosely and avoid any sharp corners to prevent damage or leakage to the spa liner
5. Prepare new additional cartridge for next time use
6. Store the spa and accessories in a dry, temperature controlled, between 0°C- 40°C(32°F- 104°F) storage location
7. Original packaging is recommended to be used for storage

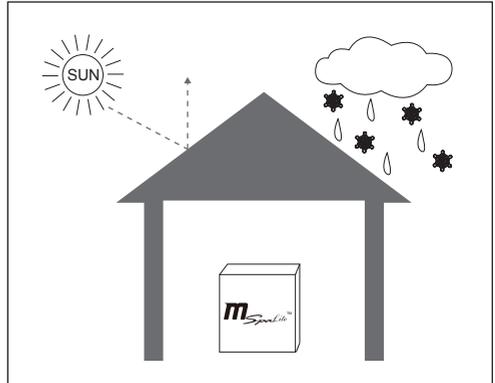

## DISPOSAL AND ENVIRONMENTAL PROTECTION



This marking indicates this product should not be disposed with other household wastes. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. You can obtain information on disposal from your local authorities.

To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

In accordance to WEEE Directive (Waste from Electrical and Electronic Equipment Directive) 2002/96/EC this equipment should not be disposed of in the normal waste stream.

# TROUBLESHOOTING

---

PROBLEM	CAUSE	SOLUTION
<b>NO DISPLAY ON THE CONTROL PANEL</b>	Power failure	Check power source
	RCD/PRCD is off	Reset RCD/PRCD
	RCD/PRCD broken	Contact the MSpa Service Center
	Pin plug connection failure 	Contact the MSpa Service Center
<b>SPA LEAKING</b>	Spa inlet/outlet connection not securely tight	Tighten the inlet and outlet connection
	Drainage valve is not closed completely	Contact the MSpa Service Center, if spa is still leaking
	Water leaks from the spa pool body	Repair the leaking hole/spilt with the repair kit material
<b>NOT HEATING PROPERLY</b>	Temperature set too low	Set a higher temperature
	Heating element failed	Contact the MSpa Service Center
	Water level is not at the minimum water line	Add more water to the minimum line
<b>BUBBLE AIR BLOWER DOES NOT WORK</b>	Pump is too hot	Unplug the control box, and reset in a while
	<b>Bubble motor is short circuit</b>	Contact the MSpa Service Center
	Auto-off 10 minute	Waiting for 10 minutes and turn on the Bubble button again

PROBLEM	CAUSE	SOLUTION
<b>FILTER PUMP DOES NOT WORK</b>	Power failure	Check the power source
	Filter stuck by dirt or other objects	Contact the MSpa Service Center
	Water level is not at the minimum water line	Add more water to the minimum line
<b>SPA TUB IN AN ABNORMAL SHAPE</b>	Extra air pressure by strong sunshine	Please check the air pressure and release air if necessary During hot weather, it recommended to check if it is necessary to release some air to avoid any possible damage to the spa pool
<b>SPA LOOSES AIR PRESSURE</b>	Air valve got loosen	Fill up the tub with air, make sure the air valves are secure, replace if necessary
	Hole or split on the spa tub	Put soap water in a squirt bottle and spray on seams. If there is a leak it will bubble. After you find the leak, clean and dry the leaking area, then use the repair patch comes with your spa. Check the repair section on P20
<b>WATER NOT CLEAN</b>	Insufficient filtering time	Increase filtration time
	Dirty filter cartridge	Clean or replace the filter cartridge in time
	Improper water maintenance	Refer to the chemical manufacture's instruction

CONTACT YOUR LOCAL MSPA DEALER OR SERVICE CENTER FOR ANY PRODUCT RELATED QUESTIONS OR PROBLEMS.

## MSPA LITE LIMITED WARRANTY

MSpa® has been manufactured with reliability and simplicity in mind. All products have been inspected and found free of defects prior to leaving the factory.

MSpa warrants this product against defects in material and workmanship for a period of:

**TWELVE (12) months** - Electric Parts (Control Box)

**SIX (6) months** - Spa pool.

The warranty period begins on the date of purchase and MSpa requires presentation of the original proof to purchase to ascertain the date. During the warranty period, MSpa will either repair or replace, at its discretion, any defective products. Replacement products or repaired parts will be warranted for only the unexpired portion of the original warranty.

### Shipping Policy

Consumers are responsible for the shipping/freight when return the defect parts to MSpa authorized service center or ORPC-Oriental Recreational Products (Shanghai)Co., Ltd.

### Warranty Policy

- This limited warranty does not apply to any defect resulting from negligence, accident, misuse, or other reason beyond MSpa's reasonable control, included but not limited to: normal wear and tear, negligence or failure to follow the product instructions, improper or inadequate maintenance; connection to improper power supply; chemical water damage, loss of pool water, unauthorized product modification or repair; use for commercial purpose; fire, lightning, flood or other external causes
- This warranty is valid only in the country of purchase in such countries where MSpa sells and services the same model with identical technical specifications
- Warranty service outside the country of purchase is limited to the terms and conditions of the corresponding warranty in the country of service. Where the cost of repairs or replacement is not covered by this warranty, MSpa will advise the owners and the cost shall be charged to the owner.
- This warranty only applies to the original purchaser and terminates upon any transfer of ownership.
- All repairs of which warranty claims are made must be pre-authorized by ORPC through an accredited distributor or agent provided that the defective part be returned to the distributor or agent Transportation Prepaid, if requested.
- All the authorized selling dealer is responsible for all in-field service work carried out on your MSpa product. ORPC will not be liable for results of cost of workmanship from unauthorized service person.
- Products marked with both MSpa and another producer are governed exclusively by the warranty provided by the other producer.

### Warranty Registration

Registration is required. Warranty Card can be only filled out by mail. All claims must be submitted to ORPC by authorized selling dealers. It is essential that all submitted claims provide all the necessary information including Customer Name, Purchase Date, Series No., Product Model, Problem, and Parts requested. Without this information the warranty will be invalid. Warranty Card must be completed and mailed to ORPC by authorized dealer within Thirty (30) days from the original purchase date.

## MSpa Service Center Locations

Country	Company Name / Address	Tel. / Fax	E-mail
Czech Republic & Slovakia	<p>Pro prodejní a poprodejní servis v České Republice a na Slovensku prosím kontaktujte</p> <p>HANSCRAFT, s.r.o.</p>	Tel.: +420 774 055 672	info@hanscraft.com
Norway	<p><b>MSPA NORGE AS</b></p> <p>Sjøskogenveien 5 1407 Vinterbro</p>	tlf: +47 64977330	mspa@spahuset.no
France	<p><b>MSPA Support et Service Après Vente France by BOOSPA</b></p> <p><a href="http://www.mspa.support/">http://www.mspa.support/</a></p>	0 892 430 060 (0.34€/min)	/
Sweden	<p><b>Handelshuset AB</b></p> <p>Add: Hantverkare gatan 24 444 32 StenungsundSweden</p>	<p>Tel: +46 303 80881</p> <p>Fax : + 46 303 80825</p>	info@hahus.se
South Africa	<p><b>MEGA MASTER</b></p> <p>No 8, Donkerhoek, Pretoria East South Africa</p> <p>www.megamaster.co.za</p>	<p>Service Phone NO.:</p> <p><b>+27 12 802 1515</b></p>	info@megamaster.co.za
Poland	<p><b>Pro-Wellness Sp. J.</b></p> <p>UL.MORAWA 48 40-353,KATOWICE POLAND</p> <p>Contact: Marcin</p> <p><a href="http://www.the-mspa.pl">http://www.the-mspa.pl</a></p>	TEL: +48 (32)353 0881	biuro@fotele.com



## MSpa® Limited Warranty Registration Card

Congratulations on purchasing a quality MSpa® product! To get the most value from your investment, please fill in the Warranty Registration Card below. By submitting this form, your warranty will be registered.

\* Note: Incomplete form will not be accepted and honored by MSpa.

Please fill out the required file with correct info:

\* Last Name: \_\_\_\_\_

\* First Name: \_\_\_\_\_

\* Mailing Address 1: \_\_\_\_\_

Address 2: \_\_\_\_\_

\* City: \_\_\_\_\_ \* State/Province: \_\_\_\_\_

\* Zip/Postal Code: \_\_\_\_\_ \* Country: \_\_\_\_\_

\* Phone Number: \_\_\_\_\_

\* Email Address: \_\_\_\_\_

\* Purchase Date: \_\_\_\_ (mm) \_\_\_\_ (dd) \_\_\_\_ yyyy \* Product Model: \_\_\_\_\_

\* Serial Number \_\_\_\_\_ [ Find the SN# underneath the control panel.  
e.g. (2GNBUB#####SC##) ]

\* Dealer Where Purchased: \_\_\_\_\_

\* Dealer Store Address: \_\_\_\_\_

\* Purchase Invoice with purchase date and product model cycled attached:

### Defect Problem Description:

Spa Pool Cracking ( ) Control Box ( ) Other Problems, state details in the below ( )

### IMPORTANT:

- For Spa pool (body) problem – Picture of defect part need to be attached along with the mail-in warranty card and is MANDATORY to claim the warranty
- For electric part(s) or control box problem – Send the control box to your local MSpa Service Center. See the Service Center Contact List in the manual.

